



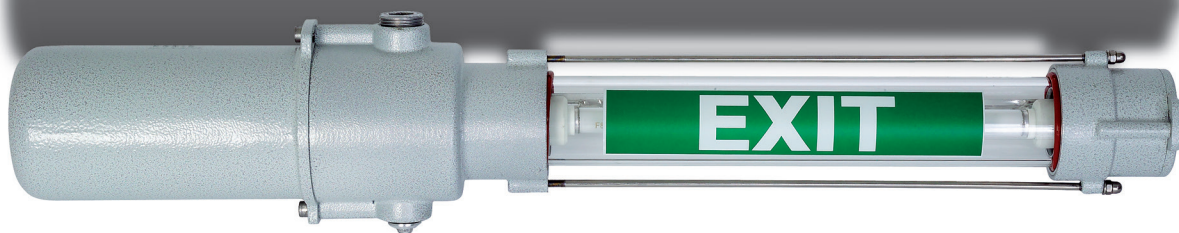
EVF-18...X series emergency lamps comply with ATEX Directive 2014/34/UE. They are certified to be installed in Zones 1, 2, 21 and 22. They also fully comply with Directive EN 60598-1 as regards the section on "emergency lamps". These lamps have been specially designed for high performance emergency lighting in areas with little overhead room especially near emergency exits or escape routes. EVF-18...X 8 Watt fluorescent tubes are fitted with electronic ballast. The red/green LED monitors battery function and warns the user in the event of a failure. In the event of a power failure, the system comes on automatically.

## Application sectors:



## CERTIFICATION DATA

<b>Classification:</b>	Group II	Category 2GD		
<b>Installation:</b> EN 60079.14	zone 1 - zone 2 (Gas)	zona 21 - zona 22 (Dust)		
<b>Marking:</b>	CE 0722 Ex II 2GD Ex d IIC T5 - Ex tD A21 IP 66			
<b>Certification:</b>	ATEX	CESI 03 ATEX 098		
<b>Standards:</b>	CENELEC EN 60079-0: 2006, EN 60079-1: 2007, EN 61241-0: 2006, EN 61241-1: 2004, EN 60598-1:2008+A11:209, EN 60598-2-1_1989, EN 61547: 2009 and EUROPEAN DIRECTIVE 2014/34/UE IEC 60079-0: 2004, IEC 60079-1: 2007, IEC 61241-0: 2004, IEC 61241-1: 2004 European Directive 2006/95 Low voltage European Directive 2004/108 Electromagnetic compatibility European Directive 2003/108 WEEE Waste electrical and electronic equipment European Directive 2011/64 RoHS			
<b>Class temperature:</b>	100°C (T5)			
<b>Ambient temperature:</b>	-20°C +55°C			
<b>Degree of protection:</b>	IP66			



### MECHANICAL FEATURES

ORIGINAL PRODUCT

<b>Body:</b>	Low copper content aluminium alloy
<b>External tube:</b>	Shock and high temperature resistant borosilicate glass
<b>Seal:</b>	Silicone resin between the aluminium heads and the glass tubes
<b>Gaskets:</b>	Acid/hydrocarbon resistant NBR
<b>Bolts and screws:</b>	Stainless steel
<b>Mounting:</b>	2 x galvanised steel brackets with Ø9 slots
<b>Entries:</b>	2 x 3/4" threaded NPT. Lighting fixture complete with 1 x PLG2NA aluminium plug
<b>Coating:</b>	Polyester coating Ral 7035 (Light grey)
<b>Corrosion Resistance:</b>	The STANDARD of the aluminium alloy used by manufacturer has passed the tests required by standards EN60068-2-30 (hot/humid cycles) and EN60068-2-11 (salt mist tests)

### ELECTRICAL FEATURES

<b>Lamp holder:</b>	Bi-pin G5
<b>Ballast:</b>	Electronic
<b>Rated voltage:</b>	230 V AC
<b>Rated frequency:</b>	50/60 Hz
<b>Connection:</b>	Direct to connectors fitted to electronic board L, N, Pe section 0.5 mm <sup>2</sup> terminal board with jumpers for input/output
<b>Emergency unit:</b>	<b>Batteries Ni/Cd 2.5 Ah - 6,5 V</b> The LED is used to monitor battery function: the green LED indicates that the lamp is charged and red indicates a faulty battery
<b>Wiring:</b>	Silicone rubber cables with glass braid protection against high temperatures

### ACCESSORIES AVAILABLE / SPECIAL REQUESTS

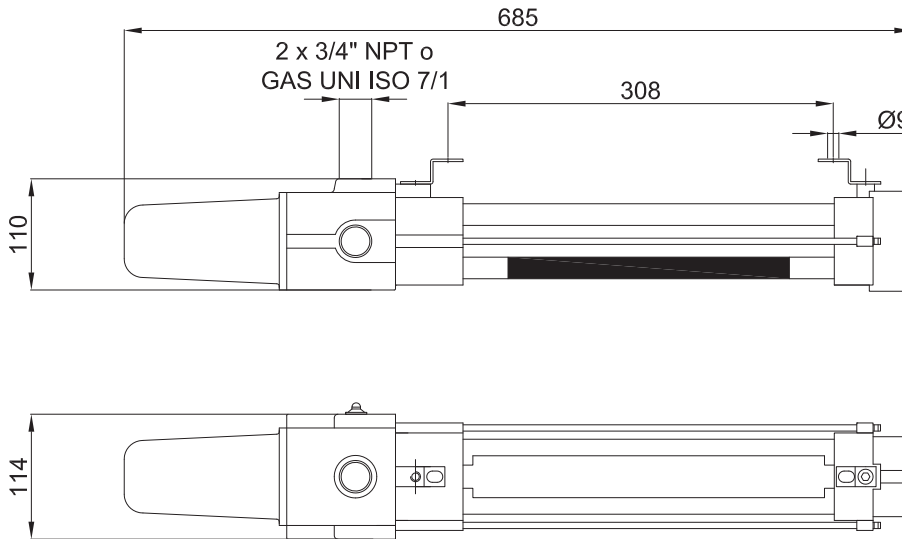
2 pin Ø16 fluorescent tubes model T5  
 Installation mounting brackets  
 Cable gland: sealed type for armoured cable or for non-armoured cable  
 Warning signs to be requested during ordering  
 Rated voltage: 120 V (code EVF-18ENX/**120**)  
 GAS UNI ISO 7/1 thread



Code	Lamp n°	Operating type	Power supply	Watt	Discharge time of batteries	Weight kg	mm
EVF-18X	1	normal	230V 50/60Hz	8	-	3,15	1175x120x155
EVF-18EX	1	emergency only	230V 50/60Hz	8	150'	3,40	1175x120x155
EVF-18ENX	1	normal + emergency	230V 50/60Hz	8	150'	3,50	1175x120x155

## DIMENSIONAL DRAWINGS

Dimensions in mm



### DON'T FORGET TO ORDER THE ACCESSORIES

Example: Type of lighting fixture  
EVF-18EX

+ Fluorescent tubes  
LAMP-L18W233

+ Installation bracket  
G-258

+ Cable gland

+ other...see key



### Standard pictograms to be applied on glass tube

Reference standard: D. LGS. 81 del 09/04/08 V, Directive 92/58/CEE, UNI EN ISO 7010



U-420/SX



U-420/S

































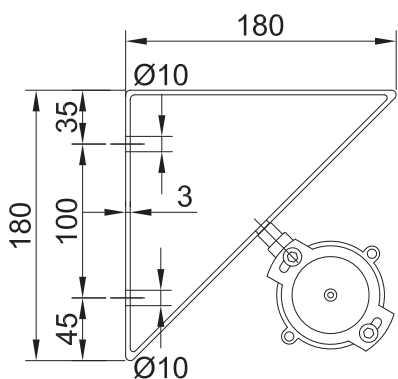
U-420/DX




U-420/G




ILLUSTRATION	DESCRIPTION	MODEL	FEATURES	CODE	KEY
	Triphosphor fluorescent tubes G5 fitting	8 W (FD8W)	430 lm	LAMPL8W21	 
	Standard pictograms to be applied on glass tube		Material: Translucent film	Upon request	 
	Tige	Length: 250 mm	Material: stainless steel	BRF8MIN/250	 
	Type D bracket complete with screws		Material: bracket: galvanised steel screws: stainless steel	G-0611	 
	Type O eyebolt		Material: galvanised steel	GOF-8	 
	Type P bracket		Material: galvanised steel	G-0480	 
	Pressacavo		Per modelli e codici dei pressacavi vedi sito <a href="http://www.antideflagrante.it">www.antideflagrante.it</a>		 
	External frame for warning sign upon request		For models and codes, visit <a href="http://www.antideflagrante.it">www.antideflagrante.it</a>	G1-0591	 
	Lamp holder	G5 fitting	230V 4A	G-0448	
	Frame with battery pack and electronic board	EVF-18X	230V 50/60Hz normal operation	G-0452	
		EVF-18EX	230V 50/60Hz emergency only	G-0451	
		EVF-18ENX	230V 50/60Hz normal + emergency	G-0451/1	
	Battery pack	EVF-18EX EVF-18ENX	Ni-Cd 2,5 Ah - 6,5 V	BATT2,5AH/NC	



45° angle mounting  
TYPE "D"



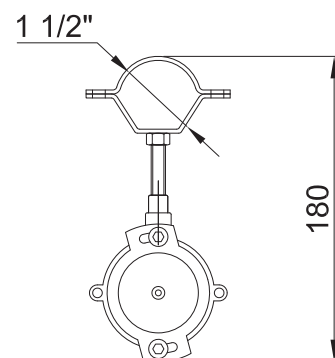Pendant mounting  
with eyebolt TYPE "O"



Mounting with  
metal clamps 1.1/2" TYPE "P"

Dimensions in mm

Lighting fixture EVF-18EX with accessory G1-0591

